CUBE 138
EMERGENCY LIGHT

CUBE 138

Cube 138 is an elegant and functional emergency light in aluminium for indoor installation. Suits perfect in applications like schools, shopping malls, warehouses, industrial and sports halls, terminal buildings etc.

Cube 138 is designed for both new building construction and renovation of existing facilities.

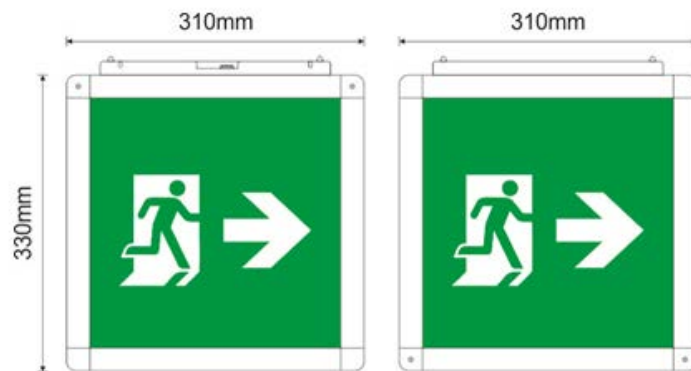**Cube 138** is delivered with 4 sided – pictograms, can be changed easily.

Cube 138 can be provided with interfaces towards;

- Potential free contacts

FEATURES & BENEFITS

- LED based marker lights

- Delivered as self-contained/auto test luminaire

- Choice of 1, 3 or 8 hour autonomy via DIP switch

- Simple and quick assembly and maintenance

- High lumen output – 1h = 370lm, 3h = 270lm, 8h = 110lm

- Read distance 50 meters.

- Technical lifetime of LED > 100 000 hours

Honeywell

CUBE 138 EMERGENCY LIGHT

TECHNICAL DATA	
Reading distance, exit sign	50m
Voltage	220-240VAC / 50-60Hz
Power consumption	6.4W / 6.6VA
Battery	4.8V/2Ah Ni-MH
Battery protection	Over charge protection /deep discharge protection
Charging Time	23 hours
Battery back-up time	1 hour / 3 hours / 8 hours (from dip switch)
Light source	16 White LEDs
Technical lifetime (light source)	>100 000 hours
Lumen output, mains	370 lm
Lumen output, emergency (1h / 3h / 8h)	370 / 270 / 110 lm
Approvals	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
Ambient temperature	5 to 40 ºC
Humidity	Up to 95%
IK rating	IK08
IP rating	IP40
Dimensions	310 x 310 x 330 mm
Weight	2448 / 3062 gr
Colour	Anodized aluminum / grey plastic
Materials	Aluminum, ABS/PC, PC, Acrylic Plate
Mounting method	Ceiling and Hanging

MODEL NO	DESCRIPTION
2925024	**Cube M ST LED 50m 230V w_pict 138h**
2925024	Battery 4.8V / 1.2Ah NiMH
290099	Plug-in module potential free

CUBE 138
EMERGENCY LIGHT
—

Honeywell