

# MULTILED 138 EMERGENCY LIGHT

## MultiLED 138

**MultiLED 138** is an elegant and functional combination of plastic guide and marking lights (ABS – polycarbonate) for indoor emergency lighting installations.

**MultiLED 138** is designed for both new building construction and renovation of existing facilities in escape route and anti-panic areas. Suits perfect for applications like parking garage, warehouses, sports halls etc.

**MultiLED 138** comes with double-sided pictogram U/D/R/L. Accessories are to be ordered separately.

**MultiLED 138** can be mounted in many ways:- ceiling, hanging, surface, recessed and flag mounting.


**MultiLED 138** can be provided with interfaces towards;

- Potential free contacts



## FEATURES AND BENEFITS

- LED based luminaire
- Delivered as self-contained/auto test luminaire
- Delivered with many accessories for ceiling, hanging, flag and surface mounting.
- Delivered with a lens for escape route areas
- Choice of 1, 3 or 8 hour autonomy via DIP switch
- Delivered with set of 6 pictograms (2xD/2xU/R/L) for two-sided mounting
- High lumen output – 1h = 330lm, 3h = 150lm, 8h = 60lm
- Technical lifetime of LED > 100 000 hours
- Simple and quick assembly and maintenance

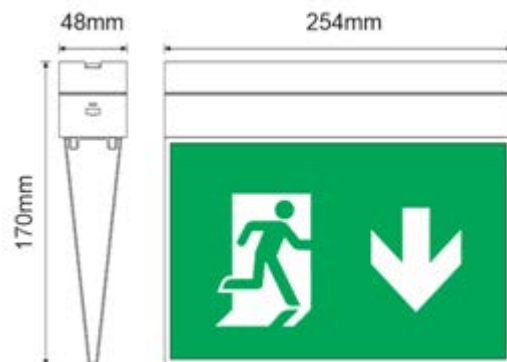

# MULTILED 138 EMERGENCY LIGHT

TECHNICAL DATA	
Reading distance, exit sign	Two-sided 20m
Voltage	220-240VAC / 50-60Hz
Power consumption	5W / 5.2VA
Battery	4.8V/1.2Ah NiMH
Battery protection	Over charge protection / deep discharge protection
Charging Time	16 hours
Battery back-up time	1 hour / 3 hours / 8 hours (from dip switch)
Light source	12 White LED
Technical lifetime (light source)	>100 000 hours
Lumen output, mains	275 lm
Lumen output, emergency (1h / 3h / 8h)	330 / 150 / 60 lm
Approvals	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
Ambient temperature	5 to 40 °C
Humidity	Up to 95%
IK rating	IK03
IP rating	IP44
Dimensions	254x48x170mm
Weight	610 / 1170 gr
Colour	White
Materials	PC, ABS/PC
Mounting method	Ceiling, wall bracket and suspended and pendulum mount

MODEL NO	DESCRIPTION
<b>138008</b>	<b>MultiLED Combi ST LED230V w/pict 138h</b>
2925024	Battery 4.8V / 1.2Ah NiMH
298100.1	MultiLED flag bracket
298100.3	MultiLED Protection Grid
298100.4	MultiLED Recessed Kit 22m
298100.5	MultiLED Recessed Kit 30m
298100.6	MultiLED Wire Pendant 2m
138189	MultiLED Pendant 1m
298100.7	MultiLED Set of 6pcs pictograms (2xD/2xU/R/L) for two-sided mounting
298100.8	Escape Route Lens
290099	Plug-in module potential free

**For more information,**

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

**Honeywell HBT India Buildings**

Unitech Trade Center, 5th Floor, Sector-43,  
Block C, Sushant Lok Phase - I,  
Gurgaon - 122 002