

OVA / OMNILED 138 EMERGENCY LIGHT

Ova/OmniLED 138

Ova/OmniLED 138 is an elegant and functional non-maintained emergency light for indoor installation. The luminaire comes with interchangeable lenses, so that can be used in both anti panic rooms and escape routes.

Ova/OmniLED 138 suits perfect for applications like office buildings, cinema, hotel, shopping center, cafe- and restaurant environment etc.

Ova/OmniLED 138 is designed for both new building construction and renovation of existing facilities. This can be ceiling mounted, also available as recessed spot with model no 138007


Ova/OmniLED 138 is provided with interfaces towards;

- Potential free contacts



FEATURES AND BENEFITS

- LED based non-maintained
- Delivered as self-contained/auto test luminaire
- Choice of 1, 3 or 8 hour autonomy via DIP switch
- Changeable lens - Escape route / Anti panic
- Increased spacing with new efficient LED lens
- High lumen output – 1h = 360lm, 3h = 170lm, 8h = 70lm
- New accessory – 5 lux lens.
- Technical lifetime of LED > 100 000 hours

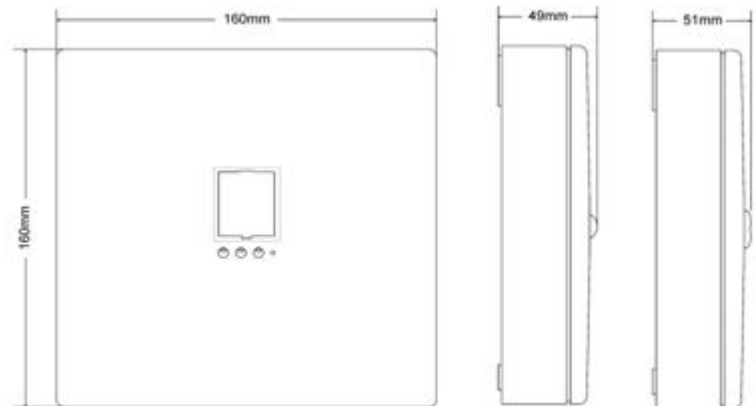

OVA /OMNILED 138 EMERGENCY LIGHT

| TECHNICAL DATA | |
|--|---|
| Reading distance, exit sign | N / A |
| Voltage | 220-240VAC / 50-60Hz |
| Power consumption | 3.4W / 3.9VA |
| Battery | 4.8V/ 1.2Ah NiMH |
| Battery protection | Over charge protection /deep discharge protection |
| Charging Time | 16 hours |
| Battery back-up time | 1 hour / 3 hours / 8 hours (from dip switch) |
| Light source | 1 white power LED |
| Technical lifetime (light source) | >100 000 hours |
| Lumen output, mains | 275 lm |
| Lumen output, emergency (1h / 3h / 8h) | 360 / 170 / 70 lm |
| Approvals | EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3 |
| Ambient temperature | 5 to 40 °C |
| Humidity | Up to 95% |
| IK rating | IK08 |
| IP rating | IP20 |
| Dimensions | 160 x 160 x 55 mm |
| Weight | 618 / 760 gr |
| Colour | White |
| Materials | PC, ABS/PC |
| Mounting method | Ceiling mounting |

| MODEL NO | DESCRIPTION |
|------------|--|
| 138006 | Ova/OmniLEDsSquare ER/AP NM ST LED 230V 138h |
| 290099 | Plug-in module potential free |
| 2925024 | Battery 4.8V / 1.2Ah NiMH |
| 2900XX.STR | 5 Lux lens for Ova/OmniLED |

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002