

# OVA/OMNILED R SPOT 138 EMERGENCY LIGHT

## Ova/OmniLED R Spot 138

Ova/OmniLED R Spot 138 is an elegant and functional non-maintained emergency light for indoor installation. The luminaire comes with interchangeable lenses, so that can be used in both anti panic rooms and escape routes.

Ova/OmniLED R Spot 138 suits perfect for applications like office buildings, cinema, hotel, shopping center, cafe- and restaurant environment etc.

Ova/OmniLED R Spot 138 is a recessed mounted luminaire.

The luminaire is designed for both new building construction and renovation of existing facilities. This can be ceiling mounted, also available as surface mounted luminaire with a different model no 138006


Ova/OmniLED R Spot 138 can be provided with interfaces towards;

- Potential free contacts



## FEATURES AND BENEFITS

- LED based non-maintained
- Delivered as self-contained/auto test luminaire
- Choice of 1, 3 or 8 hour autonomy via DIP switch
- Changeable lens - Escape route / Anti panic
- Increased spacing with new efficient LED lens
- High lumen output – 1h = 360lm, 3h = 170lm, 8h = 70lm
- New accessory – 5 lux lens.

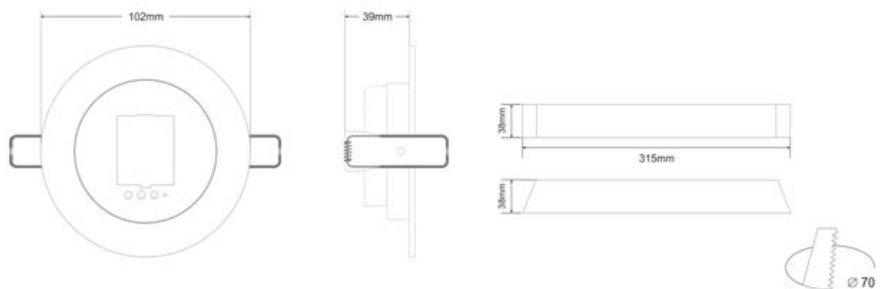

# OVA/OMNILED R SPOT 138 EMERGENCY LIGHT

TECHNICAL DATA	
Reading distance, exit sign	N / A
Voltage	220-240VAC / 50-60Hz
Power consumption	3.4W / 3.9VA
Battery	4.8V/ 1.2Ah NiMH
Battery protection	Over charge protection / deep discharge protection
Charging Time	16 hours
Battery back-up time	1 hour / 3 hours / 8 hours (from dip switch)
Light source	1 white power LED
Technical lifetime (light source)	>100 000 hours
Lumen output, mains	275 lm
Lumen output, emergency (1h / 3h / 8h)	360 / 170 / 70 lm
Approvals	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
Ambient temperature	5 to 40 °C
Humidity	Up to 95%
IK rating	IK06 – Lamp Housing / IK02 – LED Drive
IP rating	IP20
Dimensions	315 x 38 x 38 mm (main unit) Ø 102mm (spot)
Weight	459 / 611 gr
Colour	White
Materials	PC, ABS/PC
Mounting method	Ceiling mounting

MODEL NO	DESCRIPTION
138007	Ova/OmniLED R Spot ER/AP NM ST LED 230V 138h
290099	Plug-in module potential free
2925024	Battery 4.8V / 1.2Ah NiMH
2900XX.STR	5 Lux lens for Ova/OmniLED

## For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

## Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,  
Block C, Sushant Lok Phase - I,  
Gurgaon - 122 002

[www.honeywell.com](http://www.honeywell.com)

© 2020 Honeywell International Inc.

**OVA/OMNILED R SPOT 138  
EMERGENCY LIGHT**

**Honeywell**