

SEQLED ER 138 EMERGENCY LIGHT

SeqLED ER 138

SeqLED ER 138 is an elegant and functional non-maintained emergency light for indoor and outdoor installation. The luminaire can be used in escape routes areas

SeqLED ER 138 suits perfect for areas with large mountings heights like shopping centers, warehouses, sport halls, foyers and cinemas.

The luminaire is designed for both new building construction and renovation of existing facilities. This can be mounted as ceiling, surface and recessed


SeqLED ER 138 can be provided with interfaces towards;

- Potential free contacts



FEATURES AND BENEFITS

- LED based non-maintained
- Delivered as self-contained/auto test luminaire
- Choice of 1, 3 or 8 hour autonomy via DIP switch
- Greater spacing with new efficient LED
- High lumen output – 1h = 280lm, 3h = 120lm, 8h = 50lm
- IP65 – dust and waterproof luminaire
- Technical lifetime of LED > 100 000 hours
- Simple and quick assembly and maintenance

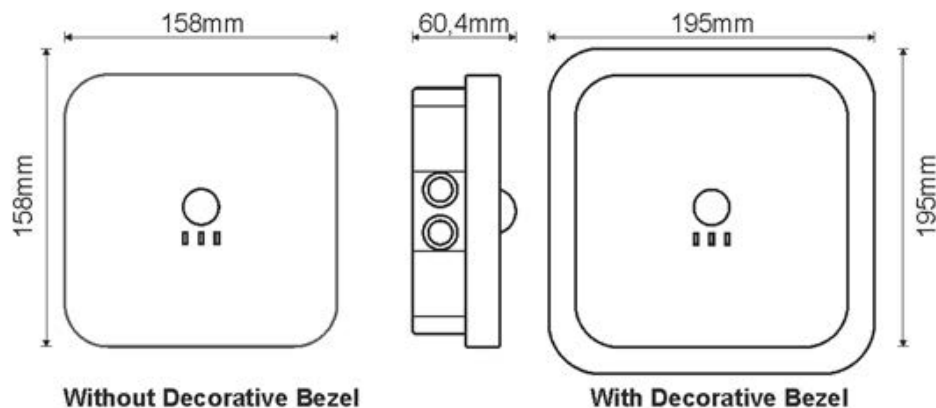

SEQLED ER 138 EMERGENCY LIGHT

| TECHNICAL DATA | |
|--|--|
| Reading distance, exit sign | - |
| Voltage | 220-240VAC / 50-60Hz |
| Power consumption | 4.8W / 5VA |
| Battery | 4.8V/1Ah Li ₄ Ti ₅ O ₁₂ |
| Battery protection | Over charge protection /full discharge protection |
| Charging Time | 16 hours |
| Battery back-up time | 1 hour / 3 hours / 8 hours (from dip switch) |
| Light source | 1 white power LED |
| Technical lifetime (light source) | >100 000 hours |
| Lumen output, mains | - |
| Lumen output, emergency (1h / 3h / 8h) | 280 / 120 / 50 lm |
| Approvals | EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3 |
| Ambient temperature | -25 to 40 °C |
| Humidity | Up to 95% |
| IK rating | IK08 |
| IP rating | IP65 |
| Dimensions | 158 x 158 x 60,4mm (without decorative bezel) 195 x 195 x 60,4mm (with decorative bezel) |
| Weight | 538 / 811 gr |
| Colour | White |
| Materials | ABS/PC, PC |
| Mounting method | Surface and Recessed ceiling mounting |

| MODEL NO | DESCRIPTION |
|----------|---|
| 138410 | SeqLED ER NM ST LED 230V 138h |
| 290BAT.5 | Battery 4.8V/ 1Ah Li ₄ Ti ₅ O ₁₂ |
| 290099 | Plug-in module potential free |

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002