

UNILED COMBI 138 EMERGENCY LIGHT

UniLED 138

UniLED 138 is a very versatile combined maintained/ non-maintained emergency light for indoor installations.

UniLED 138 is designed for both new building construction and renovation of existing facilities

Simplified selection of maintained/ non-maintained mode can be selected

With separate ceiling and wall bracket and its own battery compartment UniLED is easy to install and maintain.


SeqLED ER 138 can be provided with interfaces towards;

- Potential free contacts



FEATURES AND BENEFITS

- LED based non-maintained
- Delivered as self-contained/auto test luminaire
- Choice of 1, 3 or 8 hour autonomy via DIP switch
- Simplified selection of maintained/ non-maintained mode
- Delivered with 4 pictograms
- High lumen output – 1h = 350lm, 3h = 160lm, 8h = 60lm
- Technical lifetime of LED > 100 000 hours
- Simple and quick assembly and maintenance
- Can replace Unilux without changing wall-/ceiling bracket

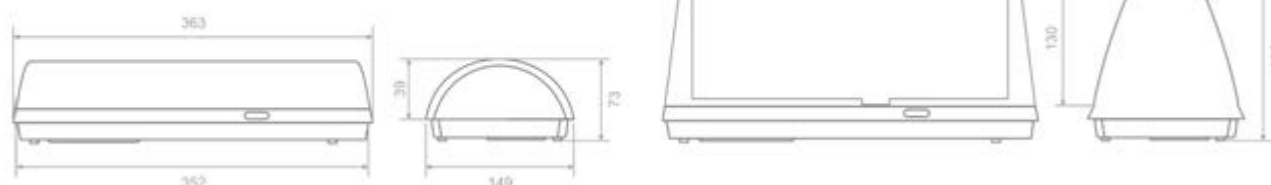

UNILED COMBI 138 EMERGENCY LIGHT

TECHNICAL DATA	
Reading distance, exit sign	One-side 27 m / Two-side 23 m
Voltage	220-240VAC / 50-60Hz
Power consumption	4.8W / 5VA
Battery	4.8V/ 1.2Ah NiMH
Battery protection	Over charge protection / deep discharge protection
Charging Time	16 hours
Battery back-up time	1 hour / 3 hours / 8 hours (from dip switch)
Light source	28 white LED
Technical lifetime (light source)	>100 000 hours
Lumen output, mains	350 lm
Lumen output, emergency (1h / 3h / 8h)	350 / 160 / 60 lm
Approvals	EN 60598-1, EN 60598-2-22, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3
Ambient temperature	5 to 40 °C
Humidity	Up to 95%
IK rating	IK09
IP rating	IP20
Dimensions	363 x 149 x 73 mm/165 mm (two-sided)
Weight	959 / 1308 gr
Colour	White, RAL 9010
Materials	PC/ABS (housing) and PC (diffuser)
Mounting method	Ceiling and Wall mounting

MODEL NO	DESCRIPTION
138057	UniLED Combi ST LED 230V w/Pict138h
290091.13	UniLED pictogram one-sided RLDU
290091.14	UniLED pictogram w/fire hose
2992020	UniLED pictogram two-sided 2xU, 2xD, RL
290091.15	UniLED pictogram kit one-sided R-D/L-D – R-U/L-U
290317	UniLED pictogram kit two-sided R-D/L-D – R-U/L-U
290312	UnUniLED pictogram two-sidediLED pictogram HC one-sided
290416	Uni-/Pro-/ImperLED ceiling/flag mounting bracket
299012	Protection grid 440 x 180 x 100mm

UNILED COMBI 138 EMERGENCY LIGHT

290420	Uni-/ProLED pendulum suspension kit 2m
290471	UniLED/ImperLED Wall Bracket
290201.1	UniLED extended diffuser w/ 6 pictograms
290099	Plug-in module potential free
2925024	4.8V / 1.2Ah NiMH
290057.STR	UniLEDLedstrip for LiFePO ₄

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

**UNILED COMBI 138
EMERGENCY LIGHT**

Honeywell